
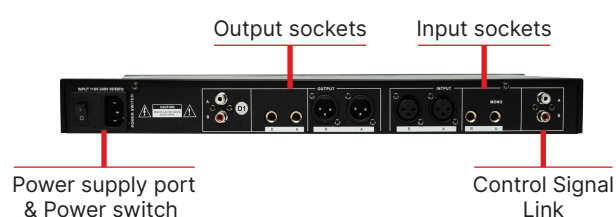


DBZ

Digital feedback exterminator

DBZ PFS100

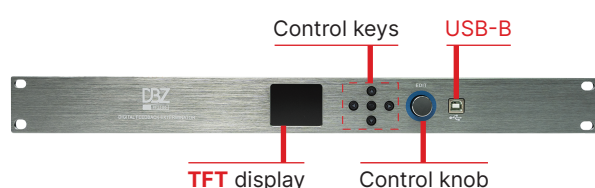

SPECIFICATIONS

Analog input	2CH-XLR and 1/4"TRS (female) input, electronically balanced/unbalanced
Input resistance	Balanced 47 Ohms, unbalanced 20 KOhms
Maximum line level input	+18dBu
Analog Output	2CH-XLR and 1/4"TRS (female) input, electronically balanced/unbalanced
Ouput impedance	Balanced >120 ohms, Unbalanced >60 ohms
Maximum Output level	+20dBu
Frequency response	20Hz - 20 kHz ; +-0.3dB
Signal-to-noise ratio	>105dB (A)
Dynamic Range	103dB
Total Hamonic distortion + noise	0.005%, 1KHz ; 20Hz-10KHZ
Operating Voltage	110V / 220V / AC 50Hz / 60Hz
Interface	Input 3-pin XLR
NET Weight	2.3kg
Package dimensions	535*80*250mm