


# ZLX-15-G2 15" 2-way passive speaker

## ZLX

- ZLX-G2 is the next generation of the best-selling pro-audio loudspeaker series from Electro-Voice
- Increased maximum SPL output and extended frequency response
- Robust and ergonomic design for day-to-day durability and portability
- Recommended to use with Dynacord DSP power amplifiers
- SONICUE integration - optimized speaker settings for best performance

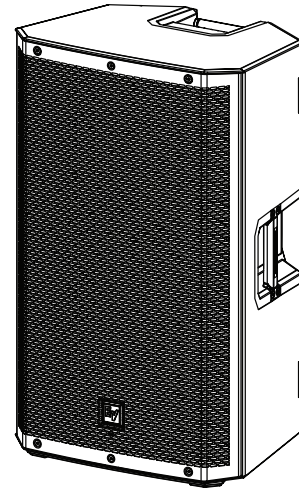

The new ZLX-G2 professional audio loudspeaker series is the next generation of the best-selling speakers from Electro-Voice, which raises the standard for performance and features in its class.

The ZLX-G2 series is offered in 15-inch, 12-inch, and new 8-inch woofer sizes, both powered and passive variants.

ZLX-G2 loudspeakers offer the best-in-class acoustic output. Electro-Voice-patented Signal Synchronized Transducers (SST) baffle design ensures improved bass, small size, and even coverage across all frequencies.

ZLX-G2 series features a 55-degree monitor angle. 12 and 15-inch models additionally include a “kickback” 23-degree monitor angle.

ZLX-15-G2 uses industry standard NL4 connections. The two NL4 connectors are in parallel and pass through all pins.

For optimal acoustics and performance, ZLX-15-G2 is recommended to be used with a Dynacord DSP power amplifier programmed with the appropriate speaker settings included in the EV Speaker Database for SONICUE.

ZLX-G2 series accessories such as padded covers, a U-bracket for mounting 12- and 15-inch models, and universal wall-mount brackets compatible with all models are available.

## Parts included

| Quantity | Component   |
|----------|-------------|
| 1        | Loudspeaker |
| 1        | User manual |



## Technical specifications

|   |                                |
|---|--------------------------------|
| Frequency response (-3 dB) (Hz) <sup>1</sup>                        | 68 Hz – 18,000 Hz              |
| Frequency range (-10 dB) (Hz) <sup>1</sup>                          | 53 Hz – 20,000 Hz              |
| Axial sensitivity (dB SPL 1W/1m)                                    | 95 dB SPL 1W/1m                |
| Maximum sound pressure level at a distance of 1 m (dB) <sup>1</sup> | 126 dB                         |
| High pass frequency (Hz)  | 40 Hz                          |
| Crossover frequency (kHz)   | 2 kHz                          |
| Coverage angle HxV (°)  | 90° x 60°                      |
| Power handling (continuous) (W)                                     | 250 W                          |
| Power handling (peak) (W)   | 1,000 W                        |
| Nominal impedance (Ω)   | 8 Ω                            |
| LF transducer   | WECA2158                       |
| LF transducer size (in)   | 15 in                          |
| LF transducer magnet material                                       | Ferrite                        |
| HF transducer   | DH-1K                          |
| HF transducer type  | Compression driver             |
| HF transducer size (in)   | 1.4 in                         |
| HF transducer diaphragm material                                    | Titanium                       |
| Dimensions (H x W x D) (mm)   | 697.6 mm x 422.8 mm x 383.1 mm |
| Dimensions (H x W x D) (in)   | 27.46 in x 16.65 in x 15.08 in |
| Shipping dimensions (H x W x D) (mm)                                | 765 mm x 490 mm x 490 mm       |
| Shipping dimensions (H x W x D) (in)                                | 30.12 in x 19.29 in x 19.29 in |
| Weight (kg)   | 16.44 kg                       |


|                      |          |
|----------------------|----------|
| Weight (lb)          | 36.24 lb |
| Shipping weight (kg) | 19.18 kg |
| Shipping weight (lb) | 42.28 lb |

1) With recommended preset


**Frequency response:**

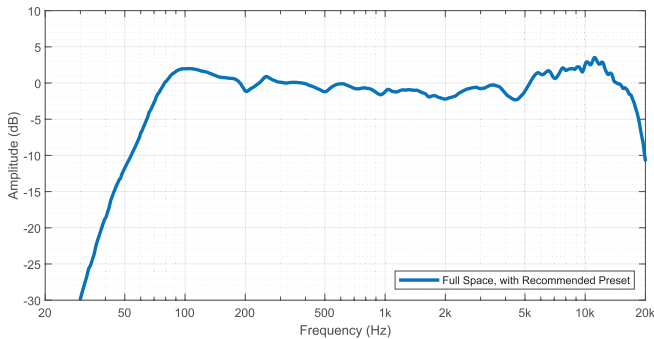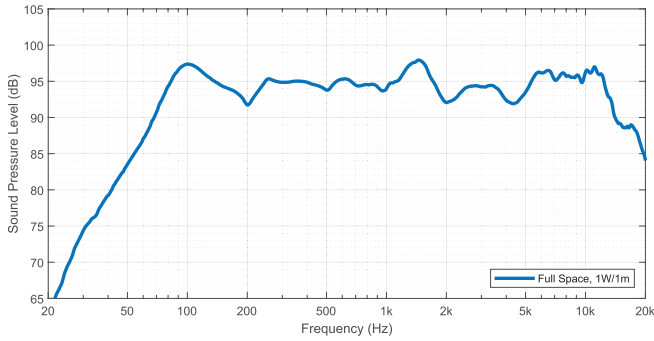

**Impedance:**

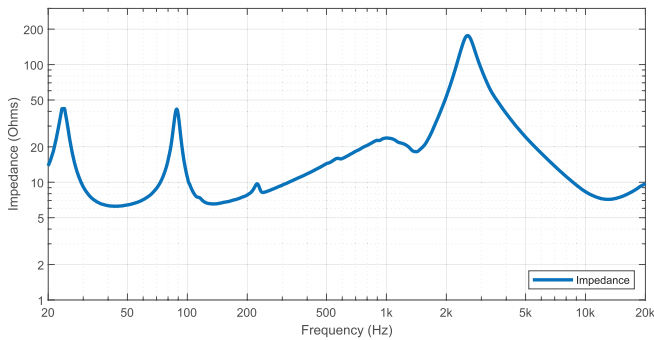

**Dimensions:**

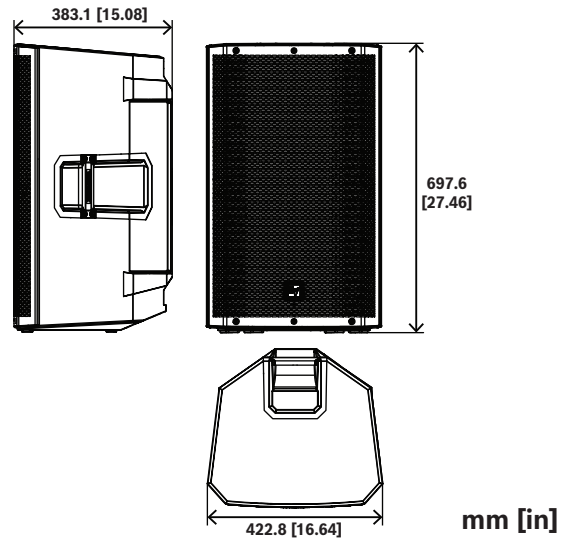

**Ordering information**

**ZLX-15-G2 15" 2-way passive speaker**  
 Passive 15-inch 2-way loudspeaker, black  
 Order number **ZLX-15-G2 | F.01U.385.532**

**Accessories**

**ZLX-15-G2-CVR Padded cover for 15" ZLX-G2 models**  
 Padded cover for 15-inch ZLX-G2 loudspeaker models, EV logo, black  
 Order number **ZLX-15-G2-CVR | F.01U.385.535**

**ZLX-G2-BRKT Wall mount bracket, ZLX G2 2-way mode**  
 Wall mount bracket for 12-inch and 15-inch ZLX-G2 loudspeakers, black  
 Order number **ZLX-G2-BRKT | F.01U.398.947**

**BRKT-POLE-L Wall mount bracket 12", 15" 2-way speaker**  
 Pole mount bracket for loudspeakers up to 15 inches, black  
 Order number **BRKT-POLE-L | F.01U.385.537**

**Represented by:**

**Germany:**  
 Bosch Sicherheitssysteme GmbH  
 Robert-Bosch-Ring 5  
 85630 Grasbrunn  
 Germany  
 www.electrovoice.com

Bosch Security Systems, LLC  
 12000 Portland Avenue South  
 Burnsville MN 55337  
 USA