


BS-P1030BIP1

IP POWERED UNIVERSAL SPEAKER

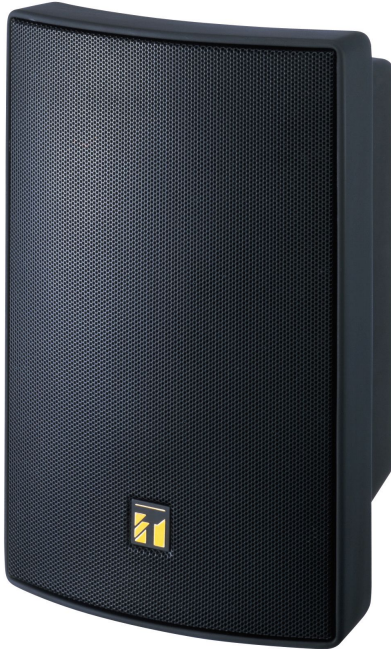

The BS-P1030BIP1 is a small, 2 way bass-reflex type, IP speaker featuring a wide frequency range suitable for use for announcements and music playback. The BS-P1030BIP1 can be used for both high-impedance and low-impedance applications.

Key features

- Can override and incorporate with local PA system without affect the central broadcast
- Local line input of IP powered speaker allow the speaker to broadcast messages from both network and local input with different priorities, ideal for classroom application.
- With built-in amplifier, allow the speaker to chain with one more ordinary speaker to provide larger coverage.
- Allow easy system expansion without difficult wiring and installation work.

Specifications

| | |
|-----------------------|--|
| Power Source | DC-24V / 2.7A |
| Power Consumption | 1.85W (Static Power) |
| Sensitivity | 90dB (1W, 1m) |
| Frequency Response | 80Hz -20kHz |
| | |
| SUB#Network I/F | 10 BASE-T/100BASE-TX, Auto negotiation |
| Network Protocol | UDP, ARP, HTTP, ICMP, IGMP |
| Operating Temperature | 0°C to +40°C |
| Operating Humidity | Below 90% RH (no condensation) |
| Finish | Enclosure: ABS resin, black color |
| Dimensions | 196 (W) x 290 (H) x 150 (D) mm |
| Included Accessories | Bracket x1, Bracket mounting screw x2, Bracket mounting washer x2, 2P terminal blocks x2 |

Dimensions

