

The TP-M15D Explosion-Proof Speaker provides added safety as to electrical operations, mechanical construction and temperature so as to prevent electrical equipment which do not generate sparks or heat that can ignite an explosive atmosphere under the condition of normal use from generating such sparks and heat.




Order no: TP-M15D

## Specifications

Frequency response	350 Hz - 4.5 kHz
Sensitivity (1#V, 1#m) (combined)	104 dB
Rated input	15 W
Tappings	100V LINE: 670Ω (15W), 1kΩ (10W), 2kΩ (5W)
Dimensions (W x H x D)	x 368
Dimensions (ø x D)	242 x 368 mm
Finish	silk grey (RAL7044 or equivalent), dark brown
Operating humidity	45 - 85 %
Operating temperature	-20°C to +40°C

## Appearance

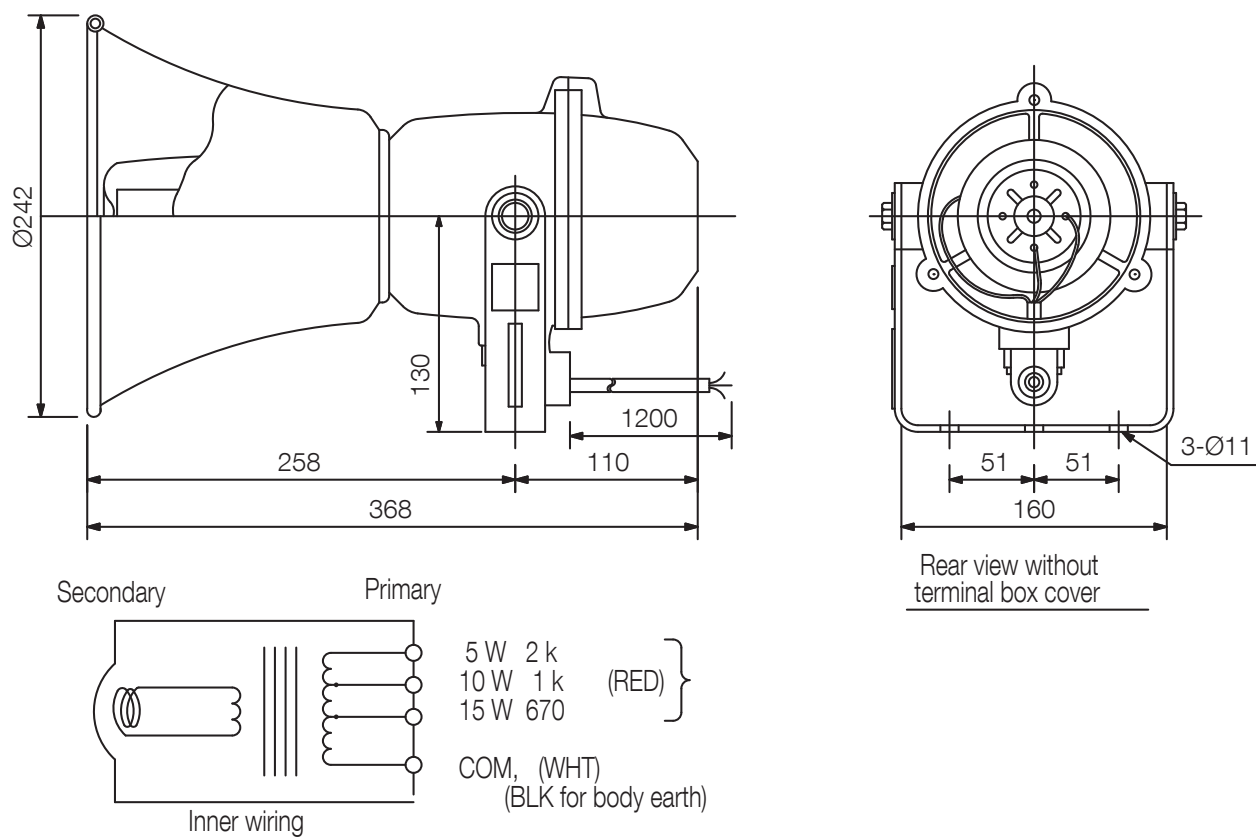

UNIT:mm

SCALE:1/5