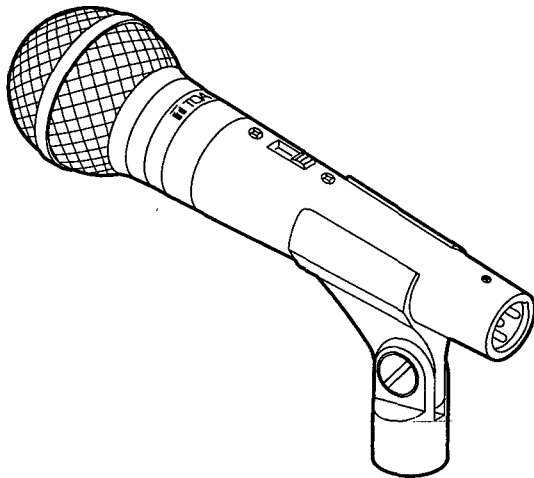
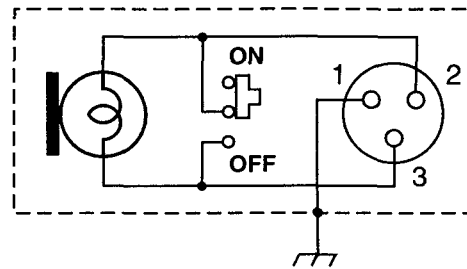


MICROPHONE
DM-1300US
■ GENERAL DESCRIPTION

Designed for both hand-held and stand mounting uses, the TOA DM-1300US is a unidirectional microphone suited for speech and vocal applications. The microphone body is rigidly constructed of diecast-zinc, and is designed to reduce switching and handling noise.

■ APPEARANCE

■ CIRCUIT DIAGRAM

■ SPECIFICATIONS

Model	DM-1300US
Type	Moving coil microphone
Directivity	Unidirectional
Rated Impedance	600 Ω , balanced
Rated Sensitivity	-54 dB (1 kHz, 0 dB = 1 V/Pa)
Frequency Response	70 Hz ~ 15 kHz
Mated Connector	XLR-3-11C or equivalent
Weight	245 g
Dimensions	ϕ 51 X 170 mm
Talk Switch	Short-off circuit type, slide switch
Finish	Body: Zinc-diecast, painted Metallic gray Head: Steel and Zinc plated steel wire, painted Metallic gray
Standard Accessory	Microphone holder (W5/8")

Specifications are subject to change without notice.