

■ DESCRIPTION

The TS-V92DU is a Delegate unit for TOA Conference system, of which compact and lightweight design makes it easy to install and store. Placing the speech button in the ON position permits speech and disables the speaker to prevent feedback. If the speech button is placed in the OFF position, the microphone cannot be used but the speaker is turned on, allowing the voices from other conference units to be monitored.


The TS-V92DU Delegate unit come with a long microphone as standard accessory.

■ SPECIFICATIONS


\* 0 dB = 1 V

Power Source	36 V DC, 30 mA or less (supplied from the Master control unit TS-V90MU)
Output	Headphone/Recording: $\phi 3.5$ mm, mini jack (3P: monaural) Internal speaker: 130 $\Omega$ , 200 mW
Control	Speech: Microphone, speaker on-off control by speech button Volume control: Headphone/Recording and internal speaker volume adjustable
Microphone unit (Accessory)	Electret condenser microphone Directivity: Unidirectional Impedance: 1.8 k $\Omega$ Sensitivity: -37 dB (1 kHz 0 dB = 1 V/Pa) Frequency response: 100 Hz - 13 kHz Length : 518 mm Weight: 105 g (0.23 lb)
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Upper case: ABS resin, pearl white paint Lower case: ABS resin, black paint
Dimensions	145.3 (W) × 70.7 (H) × 150.5 (D) mm (5.72" × 2.78" × 5.93") (Excluding microphone unit)
Weight	800 g (1.76 lb) (Excluding microphone unit)
Accessory	Long microphone unit.....1
Option	Extension cord: YR-780-2M, YR-780-10M


■ APPEARANCE

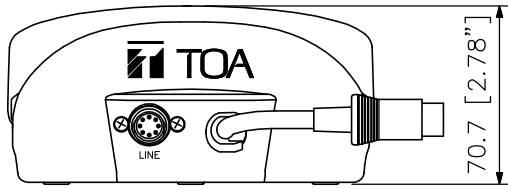


Rear View

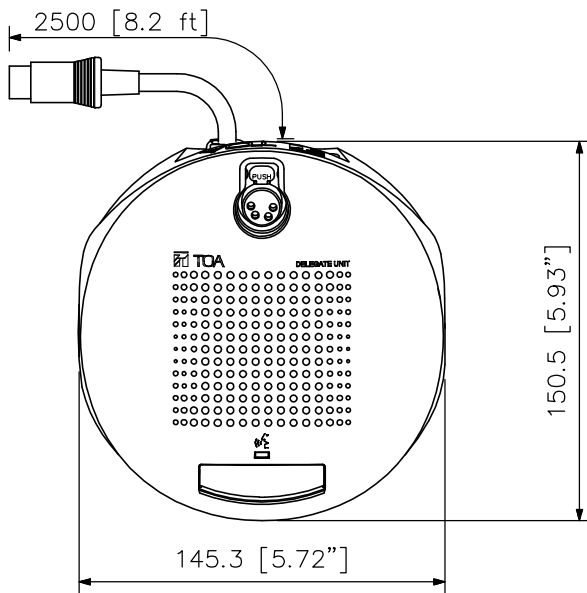

Top View

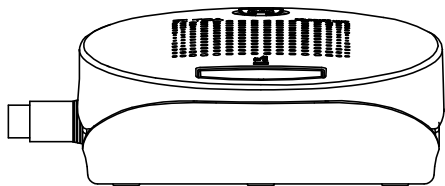

Front View

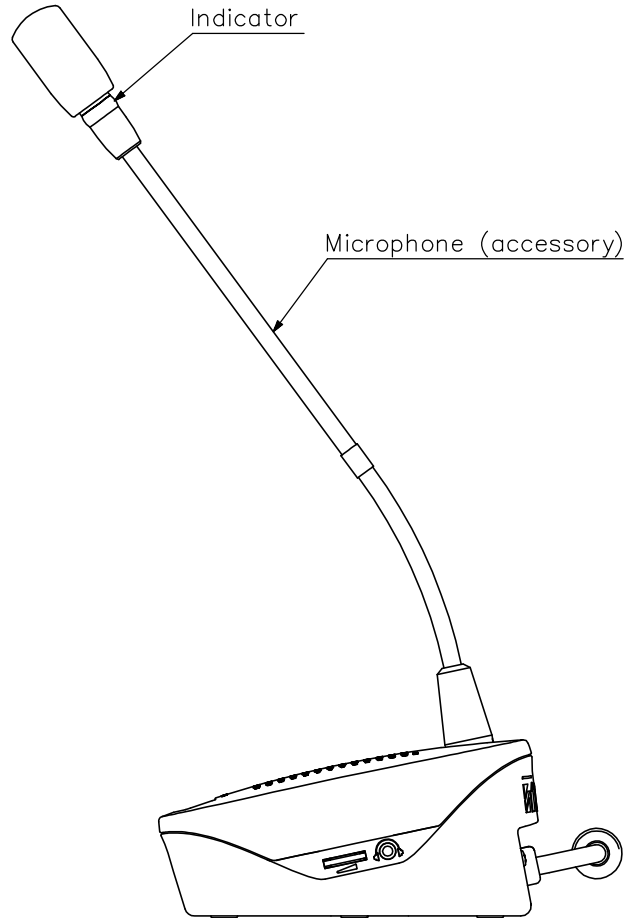

Side View

UNIT:mm SCALE:1/3